


## Typical detail:

### Existing solid wall

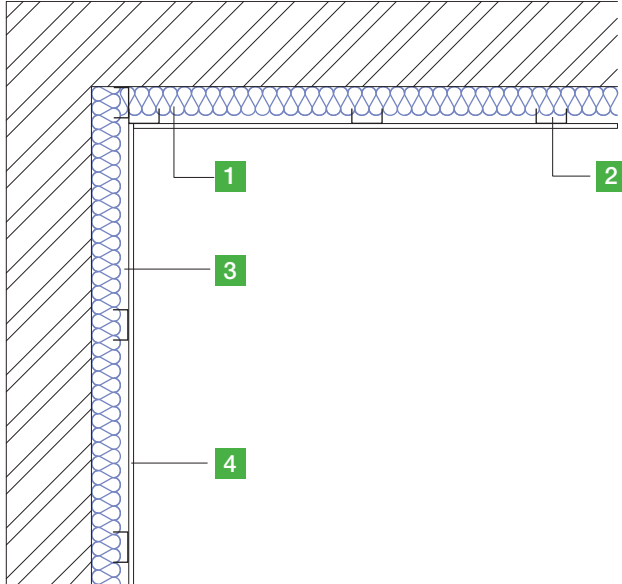

1. WALLTITE CL100 insulation between and behind studwork to achieve target U-value
2. Galvanised metal frame independent of the wall
3. Unventilated air space
4. 12.5mm vapour check wallboard and skim finish